EN GUIDE FOR INSTALLATION AND USE

COOKING HOB

COOKING GAS HOB

- DPG7341BS -





DEAR CUSTOMER

Discovering a De Dietrich product means experiencing the range of unique emotions.

The attraction is immediate, from the moment you set eyes on the product. The sheer quality of the design shines through, thanks to the timeless style and outstanding finishes which make each component an elegant and refined masterpiece in its own right, each one in perfect harmony with the others. Next, comes the irresistible urge to touch it.

De Dietrich design makes extensive use of robust and prestigious materials, where the accent is place firmly upon authenticity. By combining state-of-the-art technology with top quality materials, De Dietrich produces beautifully crafted products to help you get the most from the culinary arts, a passion shared by all lovers of cooking and fine food. We hope that you enjoy using this new appliance.

Thank you for choosing a De Dietrich product.



Contents

Using your hob in complete safety	page 4
Whats'your hob looks like	7
Installation your hob in all simplicity	7
Fitting recommendations	7
Electrical connections	10
Connecting the gas supply	11
Changing the type of gas (LPG)	13
Using your hob in all simplicity	15
How to use your gas burners	15
• Pans to use ?	16
How to look after your hob?	17
Minor troubleshooting	18
Gas cooking guide	19
After sales service	20

In the manual:



Display safety instruction



Display tips and hints



YOUR HOB IS DELIVERED PRE SET FOR USE WITH TOWN GAS 10 mbar

Your hob in complete safety

IMPORTANT SAFETY INSTRUCTIONS - READ CAREFULLY AND RETAIN FOR FUTURE USE.

This guide can be downloaded from the brand web site.

- WARNING: this appliance may be used by children aged 8 years and older, and by persons with impaired physical sensorial or mental capacities, or without experience or knowledge, if they are supervised or have received priorinstructions on how to use the appliance safely and have understood the risks involved.
- o Children must not be allowed to play with the appliance.
- Cleaning and maintenance operations must not be carried out by children without supervision.
- o Children must be supervised to ensure that they do not play with the appliance.
- It must be possible to disconnect the appliance from the power supply, either using a plug or by fitting a switch on the fixed wiring system in accordance with installation rules.
- o The electrical plug must remain accessible after installation.
- If the power cable is damaged, it should be replaced by the manufacturer, its after-sales service department or by a similarly qualified person in order to avoid danger.
- o Do not use steam cleaning appliances.
- The appliance is not designed to be switched on using an external timer or a separate remote control system.
- WARNING: leaving a hob unattended when cooking with fat or oil can be dangerous and could cause a fire.
- Never try to extinguish a fire with water but switch off the appliance, then cover the flame with a lid or a fire blanket.
- o WARNING: fire risk: do not store any items on the cooking surfaces.
- This appliance is not connected to a system for evacuating combustion products. It must be installed and connected in compliance with current regulations. Particular attention should be given to applicable ventilation requirements.

Your hob in complete safety

- o The use of a gas hob produces both heat and humidity in a room. Ensure that the kitchen is well ventilated: keep mechanical ventilators open. Prolonged, intensive use of the hob may require additional ventilation, by opening a window, for example, or ventilating the room more efficiently by increasing the setting on mechanical ventilation, where installed.
- o Do not use cookware that overhangs the edge of the hob.
- o This hob has been designed for use by private persons in their homes.
- o This appliance must be installed in compliance with current regulations and only used in a well ventilated area. Consult this guide before installing and using your appliance.
- o You should never leave cooking unattended.
- o These hobs are designed exclusively for cooking drinks and foodstuffs and do not contain any asbestos-based component parts.
- Never leave any or products in the cupboard beneath your hob (aerosols or other pressurized cans, papers, recipe books, etc.).
- o If you have a drawer underneath the hob, we recommend avoiding placing objects in it that are temperature sensitive (plastics, paper, aerosols, etc.).
- o Prior to installation, ensure that the local distribution conditions (type of gas and gas pressure) and the appliance's settings are compatible.
- The settings for this appliance are stated on the label inside the wallet or on the information plate.
- o Disconnect your hob from both electrical and gas supplies before carrying out any maintenance operations.
- o When connecting electrical appliances to a nearby socket, ensure that the power supply cable is not in contact with any hot surface on the appliance.
- o If a knob is difficult to turn, call your installer immediately.
- For safety reasons, after use, do not forget to close the main gas valve for mains gas lines or the valve on the top of your butane/propane gas cylinder.

Your hob in complete safety

- o The conformity CE mark is applied to all these hobs.
- o This appliance should be installed by a qualified technician / installer.
- Never use aluminium foil for cooking. Never place products wrapped in aluminium foil or in aluminium trays on your hob. The aluminium will melt and permanently damage your appliance.
- o To find your appliance's references easily, we recommend that you note them on the "After sales Service and Customer Relations" page (this page also explains where to find them on your appliance).
- o <u>WARNING</u>: If a crack appears in the surface of the glass, disconnect your appliance from the power supply to avoid electric shock.
- o <u>WARNING</u>: Use only hob guards designed by the manufacturer of the cooking appliance or indicated by the manufacturer of the appliance in the instructions for use as suitable or hob guards incorporated in the appliance. The use of inappropriate guards can cause accidents.
- o This hob complies with standard EN 60335-2-6, as it applies to heat buildup in class 3 appliances and the implications for their installation (in compliance with standard EN 30-1-1).

CARING FOR THE ENVIRONMENT

This appliance's packing materials are recyclable.

Recycle them and help to protect the environment by disposing of them in the council receptacles provided for this purpose. Your appliance also contains various recyclable materials. It is therefore marked with this logo to indicate that, in European Union countries, used appliances must not be mixed with other waste. Appliance recycling organised by

your manufacturer will thus be carried out in optimum conditions, in accordance with current European directive on waste electrical and electronic equipment. Consult your local authority or your retailer to find the dropoff points for used appliances nearest to your home. We thank you for your help in protecting the environment.

What your hob looks like?

DPG7341BS







Installing your hob in all simplicity

Fitting recommendation

	Width	Depth	Height
Standard cutout	26.5 cm	48 cm	5.1 cm
Outside dimensions above the work surface	31 cm	51 cm	5 cm

According to the Gas Safety Regulations of Hong Kong, any gas installation works including the installation of appliances and connection tubing, must be undertaken by registered gas installers who are registered for that appropriate classes and be employed by registered gas contractors.

Prior to installation, ensure that the local distribution conditions (nature of the gas and gas pressure) and the adjustment conditions of the appliance are compatible.

This appliance must be installed and connected in compliance with the regulations in force, and used only in a well-ventilated area. Consult the instructions before installing and using this appliance.

Since this appliance is not connected to a combustion products evacuation device, particular attention should be given to the relevant requirements regarding ventilation.

On this subject, combustion can take place only if oxygen from the air is present, so this air must be constantly renewed and the combustion products must be evacuated (a minimum air input of 2 m3/hour per kW of gas energy is required).

E.g.: Hob with 2 gas-rings

Total power: 4.5kW

 $4.5 \text{ kW} \times 2 = 9\text{m}3/\text{h} \text{ minimum flow-rate}$.

Fitting recommendations (cont'd)

The hob must be built into the worktop of a support cupboard. This worktop must be at least 3 cm thick and heat-resistant or else coated with a heat resistant material.

Please check that there is provision for ventilation at the cabinet to ensure proper operation of the gas hob.

A side-clearance of at least 30cm should be left to the right and left of the hob, 5.3cm from the rear wall.


And a side-clearance of at least 40cm should be left to the right and left of the burner. 12cm from the rear wall.


A tall cupboard or partition too close to the hob would hinder free movement of kitchen utensils

If a horizontal partition is put under the hob, it must be placed between 10 and 15 mm from the bottom of the work top. In any case, do not keep any sprays or pressurized containers in the compartment which could be just under the hob.

To ensure sealing between the cupboard and the worktop follow points below:

- 1 Remove the pan support grates, the burner caps and heads after checking their position.
- 2 Turn the hob over and place it gently over the opening in the worktop paying attention not to damage the control knobs and lighters.
- 3 Stick the foam seal around the outside of the hob.
- 4 Put the hob back the right way up and place the burners, caps and pan grates back in position.



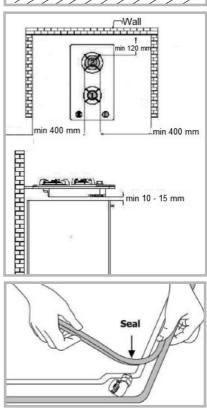

Fitting recommendations (cont'd)


- Place the hob in position in the cutout on the worktop, pulling it forward as far as possible.
- Put the bumers, caps and pan grates back in position.
- Connect the hob power supply cable to the electrical installation of the kitchen. (See "Electrical connections").
- Connect the hob to the gas.


If you wish you can lock the hob into position using attachments that come with screws (see right picture) and are secured to the corners of the housing.

Only use the holes provided.

Stop screwing when the lug starts to bend.

Do not use a power screwdriver.





The panel of this built-in hob is made of tempered glass which is safer than normal glass for this application. However, the following safety precautions for using built-in hob with glass top panel should also be noted in order to prevent the glass top panel from breaking:

- Clean the burner assembly frequently to maintain a clear gas passage on the flame distributor. Clean and tidy up the flame distributor after spillage of food and liquid once the burner assembly cooled down.
- 2. Turn off the gas appliance immediately if abnormal noise propagates from the gas appliance and contact gas supply company or gas hob importer for inspection.
- 3. Do not use oversized ustensils for cooking.
- Do not impact the glass surface with hard objects or place heavy objects on the glass surface.


Electrical connections

Your hob is delivered with a three-CROSS SECTION OF THE CABLE TO USE conductor (phase + ground + neutral) H05WF- T105 or H05V2V2F - T90 1mm2 section cable, which must be connected to a 220-240 V~ single phase mains supply by the intermediary of a two phase + earth CEI 60083 standardized neutral plug, or a single pole cut-off device with a contact opening by at least 3,5mm.

In HONG	KONG,	you	must	use	3-pin
plug that c	omply w	ith th	e relev	ant s	safety
standard E	3S 546.				

The mains plug must be accessible after installation.

CROSS SECTION OF CABLE TO BE USED			
	220-240 V _~ - 50 HZ		
Câble H05V2V2F - T90	3 conductors including 1 ground		
Cross section of conductors in mm²	1		
Fuse	10 A		



A

The safety wire (green/yellow) is connected to the ground terminal \bigoplus of the appliance and must be connected to the ground terminal \bigoplus of the installation.

The fuse in your set-up must be 5 amperes. If the power cable is damaged, it must be replaced by a cable or a special kit available from the manufacturer or his After-Sales Service.

Connecting the gas supply

Preliminary remarks

Marning

Your appliance is sold pre-set for TOWNGAS.


If the hob is installed above an oven or if the proximity of other heat generating elements threatens to cause the connection to heat up, it is vital that the connection be made using a rigid pipe and the appliance should be properly mounted. If a hose or soft pipe is used, it must not come into contact with any of the unit's moving parts or enter an area that is likely to be obstructed.

The gas supply must be connected in line with current regulations in the country of installation.

• Town gas connection :

WARNING: for a correct functioning of your appliance, the pressure of the town gas must imperatively be adjusted at **10 mbar**.

You must consequently use an external gas governor (for example Elitre model EL- 125) to be installed as follows:

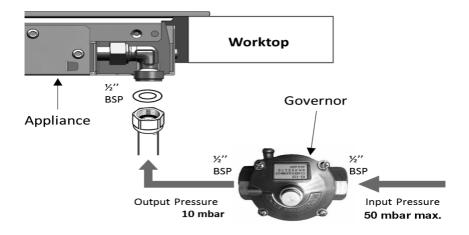

Connecting the gas supply (cont'd)

• Gas rating

Appliance designed for installation in HONG KONG - SINGAPORE Hourly input - see below at 15°C at 1013 mbar		Towngas HONG KONG 10 mbar	Towngas SINGAPORE 10 mbar
EXTRA FAST BURNER			
Indicator marked on injector		311	311
Nominal heat rating	(kW)	3.0	3.0
Low heat rating	(kW)	0.7	0.7
Hourly output	(l/h)	680	680
SEMI FAST BURNER			
Indicator marked on injector		165	165
Nominal heat rating	(kW)	1.5	1.5
Low heat rating	(kW)	0.5	0.5
Hourly output	(l/h)	340	340
30 CM HOB 2 GAS RINGS			
Total nominal heat rating	(kW)	4.5	4.5
Maximum output	(l/h)	1020	1020

• Mark on the injector

This table shows the position of the injectors on your hob depending on the type of gas you use. The number is marked on each injector.

TOWNGAS



Changing the type of gas

SWITCHING FROM TOWN GAS TO LPG GAS

Connecting the gas supply

• FOR HONG KONG: LPG CONNECTION Gas supplied by tank or cylinder.

For your safety, you must choose this connection:

Connection with a reinforced rubber hose with screw-on mechanical connectors.


In an existing system, a soft pipe fitted with clamps whose service life is five years may be used. It is necessary in this case to use an adapter without forgetting to fit a sealing washer between the adapter and the hob's elbow.



You can obtain the adaptor and the sealing washer from your After-sales Service Department.

When carrying out this operation, you should successively:

- Change the injectors
- Adjust the retarder on the taps
- **O** Change the injectors in the following way:
- Remove the supports, and all the burner caps and heads.
- Using the spanner supplied, unscrew the injectors at the bottom of each dish and remove them (fig 1).
- Replace these with the injectors supplied in the wallet, in accordance with the gas rating table at the end of the chapter; to do this:
 - ⇒Screw in the injectors by hand until they are tight.
 - ⇒Put the spanner well onto the injector. ⇒With a pencil draw a line on the hearth
 - ⇒With a pencil draw a line on the hearth plate as indicated (fig. 2).
 - ⇒Turn the spanner clockwise until the line appears on the other side (fig. 3). Warning! Do not go beyond this limit as you are liable to cause damage.
 - ⇒Put the burner heads, covers and pan supports back in position.



- A Seal (not provided)
- B Adaptor (not provided)
- Clamp (not provided)

Warning
Screw on the adaptor with a torque not exceeding 25 N.m.







Fig. 01





2ADJUST THE RETARDER ON THE TAPS

- Using a small flat-head screwdriver, screw in the brass burner-power screws (yellow) all the way, (fig. 1) screwing them in a clockwise direction.
- Replace the gaskets and the knobs, paying careful attention to their direction and ensuring that the knobs are pushed in all the way.
- Put the burner heads, covers and pan supports back in position.




Gas rating

HONG KONG - SINGAPORE		LPG
Hourly input - see below at 15°C at 1013 m	bar	G30 28/30 mbar
EXTRA FAST BURNER		
Indicator marked on injector		88A
Nominal heat rating (k	W)	3.1
Low heat rating (k	W)	0.830
Hourly output (g	/h)	225
SEMI FAST BURNER		
Indicator marked on injector		62
Nominal heat rating (k	W)	1.50
Low heat rating (k	W)	0.620
Hourly output (g	/h)	109
30 CM HOB 2 GAS RINGS		
Total nominal heat rating (k	W)	4.6
Maximum output (g	/h)	334


MARK ON THE INJECTORS

This table shows the position of the injectors on your hob depending on the type of gas you use. The number is marked on each injector.



For Singapore : LPG Connection

The gasket depicted in the diagram on the right is to prevent gas leakage. After installation, turn on the gas supply and use soap solution (never use naked flame) to check for gas leakage.



Using your hob in all simplicity

How to use your gas burner

- LIGHTING A HOB FITTED WITH A SAFETY DEVICE
- Each burner is controlled by a tap fitted with a safety system, which cuts the gas of automatic.aly if ever the flame goes out by accident (overflowing, drafts, etc.).
- The safety system for the burners is a metal rod next to the flame.
- Your hob is equipped with an automatic lighting system integrated into each control knob.
- Choose the gas burner you need using the symbols at the side of each control knob.


(e.g. : ♥ right back burner)



- To ignite a burner, press down and turn the knob anti-clockwise ... until it is pointing to the maximum position ...
- Keep the knob pressed dow. This will trigger off a series of sparks that will light up the burner.
- Adjust the flame to the height your require by turning the control knob between the and symbols.

To set off the safety system, keep the knob pressed completely down for a few seconds after the flame has lit up.

Do not use aluminium cover.
Using aluminium cover may cause abnormal combustion.





|Warning :

In the event of the burner flames being accidentally extinguished, turn off the burner control and do not attempt to re-ignite the burner for at least 1 min.



If ever your flame goes out, relight it as per normal procedure.

Which pans are best adapted for use on the gas burner?

Recommended pan sizes :

Extra burner	Small burner	
Extra-fast	Auxiliary	
18-28 cm	12-16 cm	

Adjust the flames so that they do not lick up the side of your pan.

Do not use a pan with a concave or convex bottom.


Do not leave the gas on beneath an empty pan.

Do not use pans whose bases or handles may partially cover control knobs.

Do not use heat regulators, toasters, teel meat grills or stewpot that touch the glass top.

Do not place large pans on the burners near the control knobs. These may be damaged by the very high temperatures.









Do not cook without using a lid and make sure the lid is properly fitted. This wastes energy.



Keep all natural air-vents open or have a mechanical ventilation system installed (a mechanically ventilated hood).

- Prolonged, intensive use of the hob may require extra ventilation; by opening a window for example or producing more efficient ventilation by increasing the power of the existing mechanical ventilation (a minimum air input of 2m³/ hour per kW of gas energy is required.)

How to look after your hob?

Keeping your hob in good condition is easy if you clean it **before it is completely cold.** Even so, never clean it when it is in use. Put all the electric and gas control knobs at zero.

HOW TO PROCEED PROCEED ACCESSORIES TO BE USED Injector Small hard-bristled Looking after If ever sparkers and sparkers get dirty, brush. injectors Safety pin clean them with a stiff non metallic brush. The iniectors are in the centre of each burner in the form Gas safety of a "pot". Make device Sparker sure not to block them up partially when cleaning the hob, as this will considerably reduce the performance of your gas-rings. Looking after Use a non-abrasive cream for removing any Non-abrasive the grills and persistent stains. Then rinse with clean wacream. burners ter. Dry each burner element carefully before -Household sponge. re-lighting your hob.

- It is better to clean the elements of your hob by hand, do not put any parts in the dishwasher.
- Never use scouring pads for cleaning your hob.
- Do not use a steam cleaner.

Should a crack appear on the glass, disconnect your appliance immediately and contact your After-Sales Service.

Minor troubleshooting

You have doubts about whether your hob is working correctly. This does not necessarily mean there is a breakdown. Nevertheless, check the following points.

IF YOU REALIZE THAT	WHAT SHOULD YOU DO
Lighting the burners: There is no sparking when the control knobs or buttons are pressed down.	 Check the electrical connections on the hob. Check that the sparkers are clean. Check that the burners are clean and in position. If the hob is fixed to the worktop, make sure that the fixing clamps have not been twisted. Check that the sealing rings have not come out of place.
When you only press down one control knob all the burners spark.	This is normal. The lighter system is centralised, and all the burners spark at the same time.
Sparking takes place but the bumers do not light up.	 Check that the gas inlet pipe has not been squashed. Check that the gas inlet pipe tube is less than 2m long. Check that the main gas tap is open. If you use gas tanks or cylinders check that they are not empty*. If you have just installed your hob or changed a gas cylinder, keep the control knob wide open for a few seconds so that the gas can get through. Make sure the injector is not blocked up. if this is the case, clear it with a safety pin. Light up your gas-ring before putting a pan on it.
If your table is fitted with a gas safety system and the flames go out as soon as you release the control knob.	 Push the control knob down completely and keep it under pressure for a few seconds after the burner has lit. Check that the burner parts are in place. Check that the sealing rings under the control knobs have not come out of place. Avoid any severe drafts in the room. Light the burner before putting your pan on it.
In the low position the flames go out or are too high.	 Avoid any severe drafts in the room. Check that the gas you are using corresponds to the Injectors that have been installed (See injector identification in the "Gas Rating" chapter). Remember that gas hobs are delivered preset for use with HONG KONG town gas. Check the adjustment of the low power screw (See paragraph "Changing the type of gas supply").
Flames are irregular.	 Check that the burners and injectors are clean and assembled correctly. Check you have enough gas in your gas cylinders *.
The knobs get hot during cooking.	Use small pans on the burners next to the control knobs. Large pans are to be put on the large burners furthest away from the knobs. Put the pan in place with the burner in the middle. The pan should not be above the control knobs.

^{*}Not applicable in Hong Kong.

Gas-cooking guide

	DISHES	TIME	EXTRA- FAST	SEMI-FAST
SOUPS	Broths	8-10 minutes		
	thick soups		X	
FISH	Court-bouillon	8-10 minutes	Χ	
	Grilled	8-10 minutes	Χ	
SAUCES	Hollandaise, béarnaise			X
	Béchamel, aurore	10 minutes		×
VEGETABLES	Endives, spinachs		Х	
	Peas in sauce	25-30 minutes	Χ	
	Provence tomaotes	15-20 minutes	Χ	
	Fried potatoes		Χ	
	Pasta		Χ	
MEAT	Steak		Χ	
	Blanquette, Osso-bucco	90 minutes	Χ	
	Fried escalope	10-12 minutes	Χ	
	Tournedos	10 minutes	Χ	
FRYING	Chips		Х	
	Fritters		Χ	
DESERTS	Rice pudding	25 minutes		Х
	Stewed fruit		Χ	X
	Pancakes	3-4 minutes	Χ	
	Chocolate	3-4 minutes		X
	Custard	10 minutes		X

After Sales Service

Any maintenance on your equipment should be undertaken by:

- either your dealer,
- or another qualified mechanic who is an authorised agent for the brand appliances. When making an appointment, state the full reference of your equipment (model, type and serial number). This information appears on the manufacturer's nameplate attached to your equipment.



Find full information about the brand at : www.de-dietrich.com

CZ5703848_00 - 11/19